


iEi®

防水工業型平板電腦

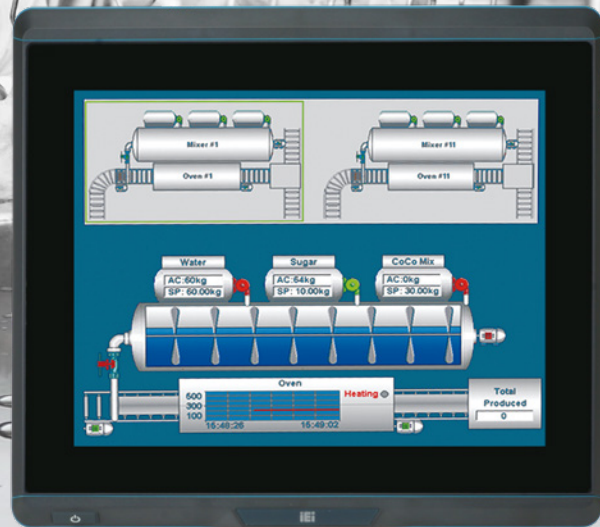

UPC-F12C-ULT3

Application



屠宰場



物流與庫存管理



食品加工



精準農業

UPC-F12C-ULT3

Award

2018年紅點設計大獎




red^{dot} award 2018
winner




UPC-F12C-ULT3

Features




Intel® 6th Gen i5 dual core & Celeron 高計算能力, 低功耗




支援IP65 & IP 66 I/O ports



12.1吋電阻/投射電容式觸控面板, 具紫外線防護功能



工作溫度
-20°C ~ 60°C degree
-40°C ~ 60°C degree



2.5吋SATA和M.2儲存介面,
2.5"硬碟可自行更換

UPC-F12C-ULT3

Features



IP65 標準款防水塞



- Total 7 rear I/O
- 3 types of diameters
- 2 x 3mm
- 1 x 4mm
- 1 x 5mm



IP66 M12防水接頭

- Total 6 rear M12 I/O
- RS-232/RS-485, 485
- 1 for GbE LAN
- 2 for USB2.0



UPC-F12C-ULT3

Features

Protection 防震動



Communication

內置Wifi 802.11 a/b/g/n/ac,
藍芽無線通信功能



Data Storage

支援2.5吋SATA和M.2
兩種儲存介面



UPC-F12C-ULT3




國際防水等級

IEC Standard 60529



IP65

- Test duration: 1 minute per square meter for at least 3 minutes
- Water volume: 12.5 litres per minute
- Pressure: 30 kPa at distance of 3 m

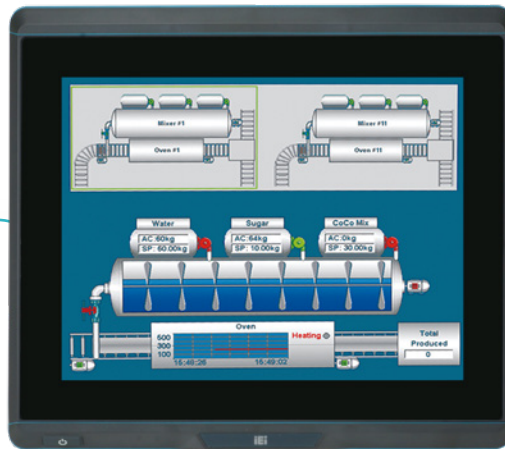

IP66

- Test duration: 1 minute per square meter for at least 3 minutes
- Water volume: 100 litres per minute
- Pressure: 100 kPa at distance of 3 m

UPC-F12C-ULT3